

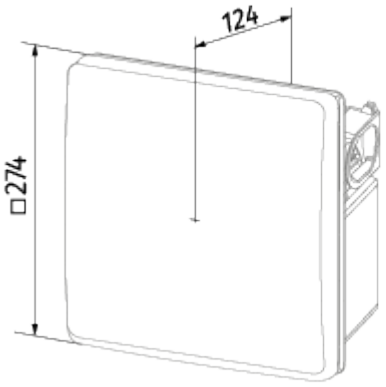
# Valeo 35/60 H

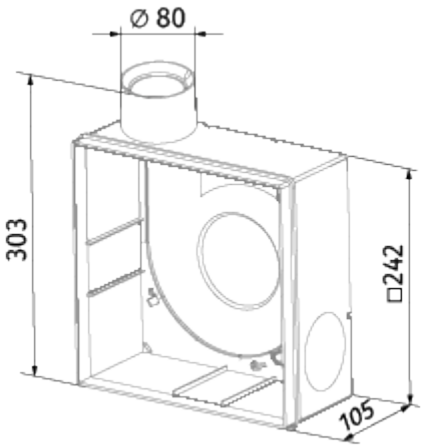
Fan units for exhaust ventilation/built-in fan modules

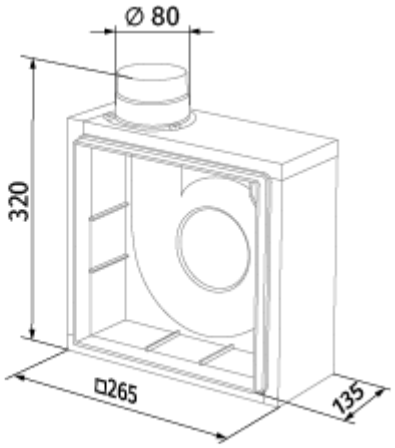
- Control: Wired control panel
- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Humidity sensor: Built-in

| | Unit of measurement | Valeo 35/60 H | |
|---|---|---|---|
| Speed | - | 1 | 2 |
| Phases | - | 1 | |
| Maximum supply voltage | V | 240 | |
| Minimum supply voltage | V | 220 | |
| Power supply frequency | Hz | 50 | |
| Maximum airflow | m³/h | 35 | 63 |
| Weight | kg | 2.7 | |
| Ambient air temperature min | °C | 1 | |
| Ambient air temperature max | °C | 40 | |
| Ingress protection rating | - | IP55 | |

## Dimensions


124
□274


∅ 80
303
□242
105


∅ 80
320
□265
135

## Ecodesign

| | | | | | | |
|---|---|---|---|---|---|---|
| Trademark | Blauberg | | | | | |
| Model | Valeo 35/60 H | | | | | |
| Specific energy consumption (SEC) (kWh/(m²/a)) | Cold | | Average | | Warm | |
| | -47.4 | A+ | -20.3 | D | -4.8 | F |
| Type of ventilation unit | Unidirectional | | | | | |
| Type of drive installed | 2-speed | | | | | |
| Type of heat recovery system | None | | | | | |
| Maximum flow rate (m³/h) | 63 | | | | | |
| Electric power input (W) | 25 | | | | | |
| Reference flow rate (m³/s) | 0.01 | | | | | |
| Reference pressure difference (Pa) | 54 | | | | | |
| Specific power input (SPI) (W/(m³/h)) | 0.429 | | | | | |
| Control typology | Local demand control | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Declared typology | RVU UVU | | | | | |
| Sound power level (dB(A)) | 47 | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 320 | | 320 | | 320 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 5536 | | 2830 | | 1280 | |